

Product Data Sheet

50095 Lumilux[®] Green SN-F2

www.honeywell-lumilux.com

Main use Long afterglow products according to DIN 67510 part 4
Useable for Solvent-based paints and inks, thermoplastics, thermosetting plastics

Typical chemical properties

Composition alkaline earth aluminate
Insoluble in alkalies, organic solvents
Decomposition by water, acids


Typical physical properties

Appearance yellow-green powder
Specific gravity 3.4 g/cm³
Particle size distribution d₅₀ = max. 24 µm as determined by COULTER Lasersizer 230
Screen analysis max. 1 % oversized particles on 125 µm testing screen

Typical luminescent properties

Excitation white light, UV radiation
Color of fluorescence green
Color of phosphorescence green
Reference criterion to DIN 67510, part 1 min. 270/40-3200-W-K


Typical decay curve

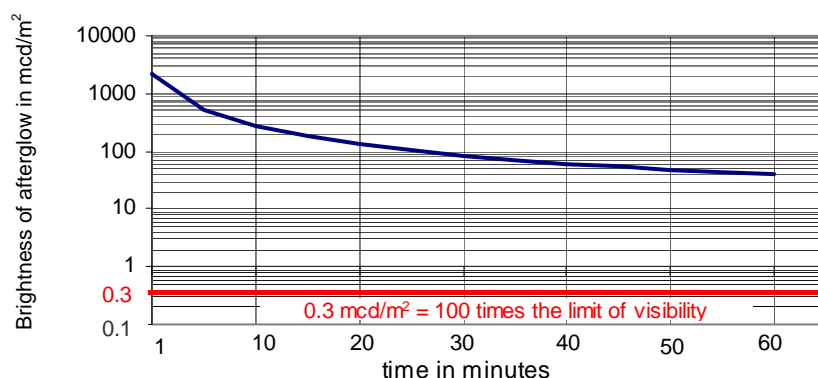

Typical intensity of afterglow according to the German norm DIN 67510-1:
Photoluminescent pigments and products - Part 1:
Measurement and marking at the producer

after 5 minutes	550 mcd/m ²
after 10 minutes	270 mcd/m ²
after 60 minutes	40 mcd/m ²
after 120 minutes	17 mcd/m ²

Typical excitation (left) and phosphorescence (right) spectra

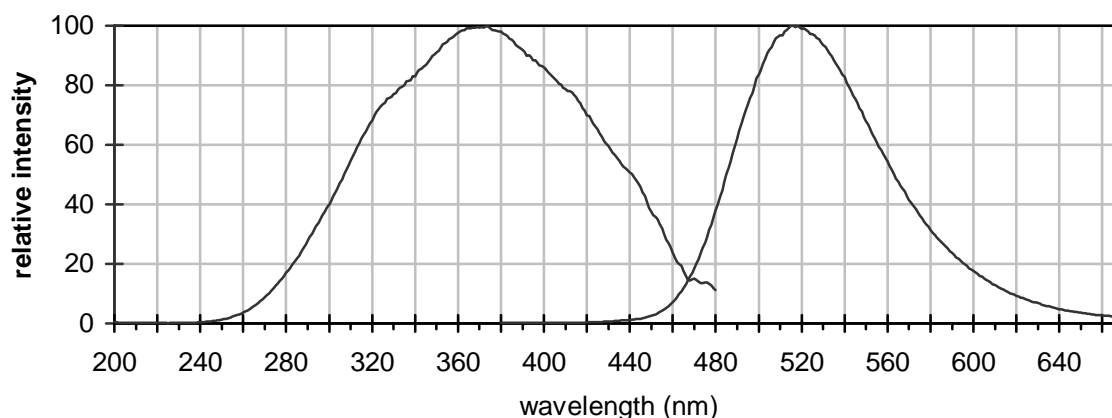

Lumilux[®] is a registered trademark of Honeywell International Inc.

Disclaimer: Although all statements and information in this Product Data Sheet are believed to be accurate and reliable, they are presented without guarantee or warranty of any kind, express or implied, and risks and liability for results obtained by use of the products or application of the suggestions described are assumed by the user. Statements or suggestions concerning possible use of the products are made without representation or warranty that any such use is free of patent infringement and are not recommendations to infringe any patent. The user should not assume that toxicity data and safety measures are indicated or that other measures may not be required. Further information concerning safe handling procedures can be obtained at <http://www.honeywell.com/sites/sm/lumilux> or by contacting Honeywell.